

Specifications

| Model | Z-34/22N | |
|-------------------------------|----------|------------|
| Measurements | Metric | US |
| Working height maximum* | 12.52 m | 40 ft 6 in |
| Platform height maximum | 10.52 m | 34 ft 6 in |
| Horizontal reach maximum | 6.78 m | 22 ft 3 in |
| Up and over clearance maximum | 4.62 m | 15 ft 2 in |
| ▲ Platform length | 0.76 m | 2 ft 6 in |
| ▲ Platform width | 1.42 m | 4 ft 8 in |
| ▲ Height - stowed | 2.00 m | 6 ft 7 in |
| ▲ Length - stowed | 5.72 m | 18 ft 9 in |
| ▲ Storage height | 2.26 m | 7 ft 5 in |
| ▲ Storage length | 4.19 m | 13 ft 9 in |
| ▲ Width | 1.47 m | 4 ft 10 in |
| ▲ Wheelbase | 1.88 m | 6 ft 2 in |
| ▲ Ground clearance - center | 0.14 m | 5.5 in |

Productivity

| | | |
|---------------------------|---------------------|-------------------|
| Lift capacity | 227 kg | 500 lbs |
| Platform rotation | 180° | 180° |
| Vertical jib rotation | 139° | 139° |
| Turntable rotation | 355° non-continuous | |
| Turntable tailswing | zero | zero |
| Drive speed | 6.4 km/h | 4.0 mph |
| Drive speed - raised** | 1.1 km/h | 0.68 mph |
| Gradeability - stowed*** | 35% | 35% |
| Turning radius - inside | 2.13 m | 7 ft |
| Turning radius - outside | 4.08 m | 13 ft 5 in |
| Controls | 24V DC proportional | |
| Tyres - solid non-marking | 56 x 18 x 45 cm | 22 x 7 x 17.75 in |

Power

| | | |
|-------------------------|--|--------|
| Power source | 48V DC (eight 6 V batteries 315 Ah capacity) | |
| Auxiliary power unit | 24V DC | 24V DC |
| Hydraulic tank capacity | 15.1 L | 4 gal |

Sound & Vibration Levels

| | | | | |
|---------------------------------|-----------------------|---------------------------|-----------------------|---------------------------|
| Sound pressure level (ground) | <70 dBA | <70 dBA | <70 dBA | <70 dBA |
| Sound pressure level (platform) | <70 dBA | <70 dBA | <70 dBA | <70 dBA |
| Vibration | <2.5 m/s ² | <8 ft 2 in/s ² | <2.5 m/s ² | <8 ft 2 in/s ² |


Weight****

| | | |
|--|----------|------------|
| | 5,171 kg | 11,400 lbs |
|--|----------|------------|


Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280:2013); 2004/108/EC; 2006/95/EC (LVD)

Range Of Motion Z-34/22N

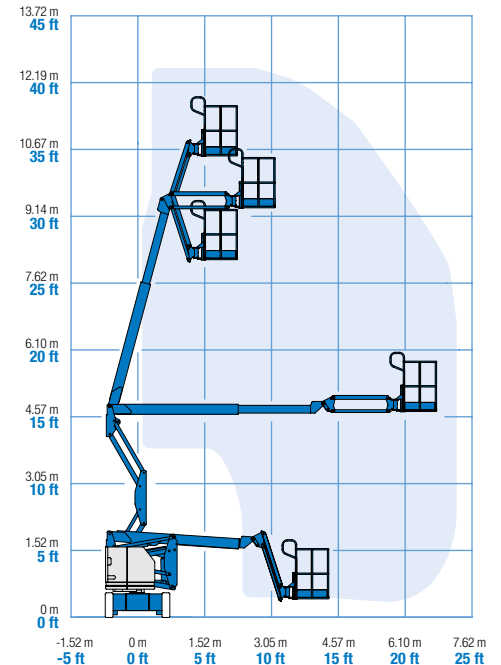

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** In lift mode (platform raised), the machine is designed to operate on firm, level surfaces only.
 *** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 **** Weight will vary depending on options and/or country standards.

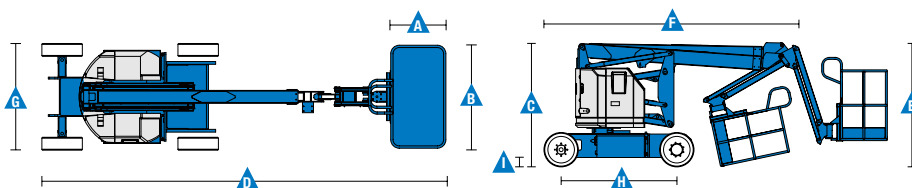

Features

| Standard Features | Easily Configured To Meet Your Needs | Options & Accessories |
|-------------------|--------------------------------------|-----------------------|
|-------------------|--------------------------------------|-----------------------|

Measurements

- 12.52 m (40 ft 6 in) working height
- 6.78 m (22 ft 3 in) horizontal reach
- 4.62 m (15 ft 2 in) up and over clearance
- Up to 227 kg (500 lbs) lift capacity

Productivity

- 1.22 m (4 ft) jib boom with 139° working range
- Self-levelling platform
- Hydraulic platform rotation
- Proportional joystick controls
- Telematics-Ready Connector
- Thumb rocker steer
- Drive enable
- AC power cord to platform
- Horn
- Hour meter
- Tilt alarm
- Descent & travel alarms
- Flashing beacon
- 355° non-continuous turntable rotation
- Zero tailswing
- Certified load sensor

Power

- 48V deep cycle battery pack
- 24V DC auxiliary power
- Universal 30A battery smart charger
- Battery charge indicator

Platform Options

- Steel 1.42 m (4 ft 8 in) (standard)
- Steel 1.17 m (3 ft 10 in)

Jib

- Articulating 1.22 m (4 ft) jib boom

Power

- 48V DC (eight 6V 315 Ah capacity)

Drive

- 2 x 4

Tyres

- Solid rubber non-marking

Productivity

- Platform top auxiliary rail
- Air line to platform
- Power to platform (incl. plug, socket and ground fault interrupt leakage on request)
- Work lights package (2 on chassis, 2 on platform)
- Aircraft protection kit ^(1,2): platform foam padding and padded disable system (except RJ model)
- Hostile environment kit ⁽²⁾: cylinder bellow, boom wiper seals and platform control box covers
- Biodegradable hydraulic oil ⁽²⁾
- Tilt cut-out option
- Track & Trace ⁽³⁾ (GPS unit providing machine location & operating information)
- Lockable platform control box cover
- Tool tray
- Operator Protective Alarm
- Keypad unlocking device

Power

- AGM maintenance-free batteries ⁽²⁾
- Low temperature cut-out module



⁽¹⁾ Reduces platform load capacity to 199.6 kg (440 lbs)
⁽²⁾ Factory-fit option only
⁽³⁾ Includes a first 2 years subscription

United Kingdom

The Maltings, Wharf Road, Grantham NG31 6BH, T: +44 800 988 3739 (toll free), Fax +44 (0)1476 584334, Email AWP-InfoEurope@terex.com
 Visit www.genielift.co.uk/locations to view our global locations list.

Worldwide Manufacturing And Distribution

Australia · Brazil · Caribbean · Central America · China · France · Germany · Italy · Japan · Korea · Mexico · Russia · Southeast Asia · Spain · Sweden · United Arab Emirates · United Kingdom · United States

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2016 Terex Corporation.

